



***3-4.** A tension test was performed on a specimen having an original diameter of 12.5 mm and a gauge length of 50 mm. The data are listed in the table. Plot the stress-strain diagram, and determine approximately the modulus of elasticity, the ultimate stress, and the fracture stress. Use a scale of 20 mm = 50 MPa and 20 mm = 0.05 mm/mm. Redraw the linear-elastic region, using the same stress scale but a strain scale of 20 mm = 0.001 mm/mm.

Load (kN)	Elongation (mm)
0	0
11.1	0.0175
31.9	0.0600
37.8	0.1020
40.9	0.1650
43.6	0.2490
53.4	1.0160
62.3	3.0480
64.5	6.3500
62.3	8.8900
58.8	11.9380


***3-16.** Determine the elongation of the square hollow bar when it is subjected to the axial force $P = 100$ kN. If this axial force is increased to $P = 360$ kN and released, find the permanent elongation of the bar. The bar is made of a metal alloy having a stress-strain diagram which can be approximated as shown.

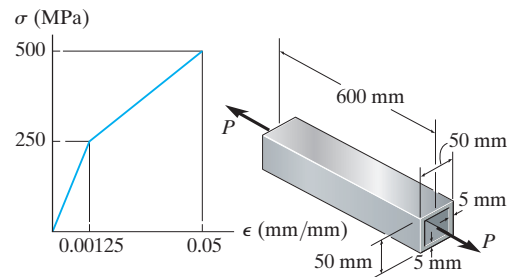

•3-21. The stress-strain diagram for a polyester resin is given in the figure. If the rigid beam is supported by a strut AB and post CD , both made from this material, and subjected to a load of $P = 80$ kN, determine the angle of tilt of the beam when the load is applied. The diameter of the strut is 40 mm and the diameter of the post is 80 mm.



•3-29. The aluminum block has a rectangular cross section and is subjected to an axial compressive force of 8 kip. If the 1.5-in. side changed its length to 1.500132 in., determine Poisson's ratio and the new length of the 2-in. side. $E_{al} = 10(10^3)$ ksi.



3-39. The rigid beam rests in the horizontal position on two 2014-T6 aluminum cylinders having the *unloaded* lengths shown. If each cylinder has a diameter of 30 mm, determine the placement x of the applied 80-kN load so that the beam remains horizontal. What is the new diameter of cylinder A after the load is applied? $\nu_{al} = 0.35$.

